CHAPTER THIRTEEN

BODY

This chapter contains removal and installation procedures for body panels, luggage racks and front carry handle.

It is suggested that as soon as the part is removed from the vehicle all mounting hardware (i.e. small brackets, bolts, nuts, rubber bushings, metal collars, etc.) be reinstalled onto the removed part. Honda makes frequent changes during the model year, so your part and the way it is attached to the frame, may differ slightly from the one used in the service procedures in this chapter.

FRONT CARRIER AND FRONT LUGGAGE CARRIER


Removal/Installation


Refer to **Figure 1** for this procedure.


NOTE

This procedure is shown on a 4-wheel drive model. The procedure is the same for both models with the exception of lower bolt locations for the front carrier.

- 1. Place the vehicle on level ground and set the parking brake.
- 2. Remove the rear bolts (**Figure 2**) securing the front luggage carrier to the frame.
- 3. Remove the bolts (A, Figure 3) on each side securing the front luggage carrier to the front carrier.
- 4. Carefully pull straight up and remove the front luggage carrier (B, **Figure 3**) from the front fender and the frame.
- 5. Remove the bolts (A, **Figure 4**) securing the front carrier to the frame and remove the front carrier (B, **Figure 4**).

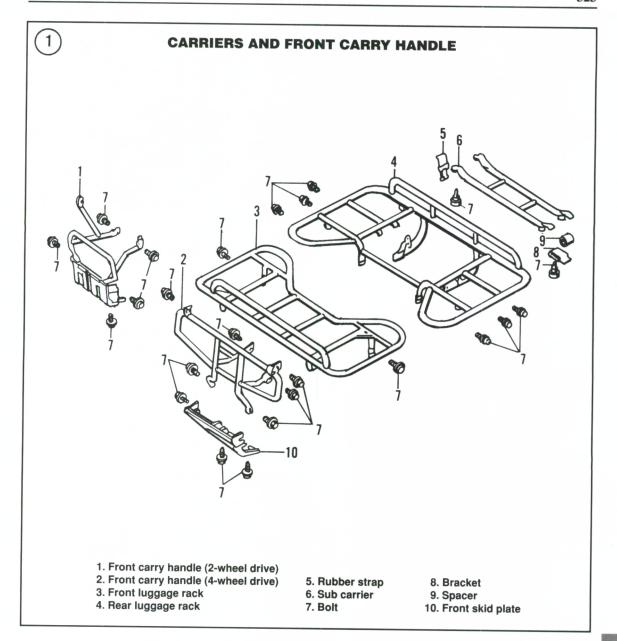






6. Install by reversing these removal steps. Tighten all bolts securely.


FRONT FENDER

Removal/Installation

Refer to Figure 5 for this procedure.

1. Disconnect the headlight electrical connectors (A, **Figure 6**).



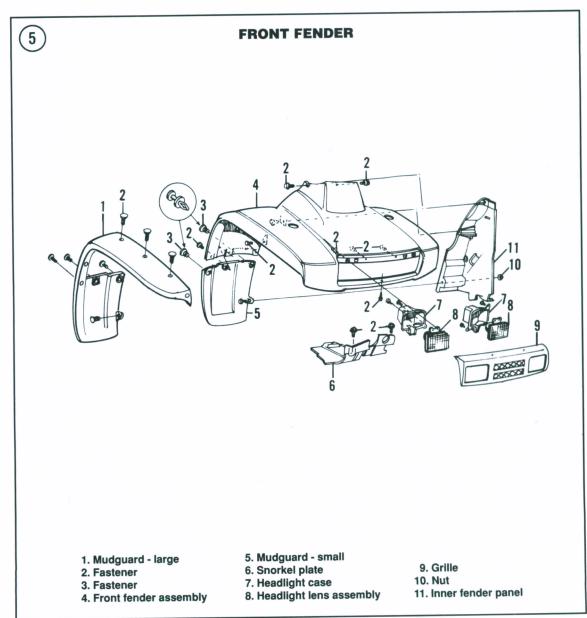

Copyright of Honda TRX300/FOURTRAX 300 & TRX300FW/FOURTRAX 300 4x4, 1988-2000 is the property of Penton Media, Inc. ("Clymer") and its content may not be copied or emailed to multiple sites or posted to a listsery without the copyright holder's express written permission. However, users may print, download, or email articles for individual use.